Pair and List Abstractions

Pairs (Constructors, Accessors, Contract, Operations)

```
(cons <x> <y>) -> <Pair>     ; cons: T1, T2 -> Pair
(car (cons <x> <y>)) = <x>   ; car: Pair -> T1
(cdr (cons <x> <y>)) = <y>   ; cdr: Pair -> T2
```

Lists

```
; List = T X (nil ∪ List)
(list <elem_1> <elem_2> ... <elem_n>) ==
  (cons <elem_1> (cons <elem_2 ... (cons <elem_n> nil))..)
```

Operations

```
(null? <elem>) -> #t if <elem> is nil (#f)
(pair? <item>) -> #t if <item> is a pair
(define (atom? x) (not (pair? x)))
```

Examples

```
(define 1-to-4 (list 1 2 3 4))
```




```
1-to-4 -> (1 2 3 4)   ; NOTE: printed rep for list!
(car (cdr 1-to-4)) -> 2

(pair? (cdddr 1-to-4)) -> #t
(cdddr 1-to-4) -> (4)
```

Accessing nth item in a list

- **For n=0, `list-ref` should return the `car` of the list**
- **Otherwise, `list-ref` should return the (n-1)st item of the `cdr` of the list.**

```
; list-ref: List, Int -> T
(define (list-ref lst n)
  (if (= n 0)
      (car lst)
      (list-ref (cdr lst) (- n 1))))

(list-ref 1-to-4 3) -> 3
```

Copy a list

```
(define (copy lst)
  (if (null? lst)
      nil                          ; base case
      (cons (car lst)
            (copy (cdr lst)))))    ; recursion
```

Append two lists

- If `list1` is the empty list, then result is just `list2`
- Otherise, `append` the `cdr` of `list1` with `list2`, and `cons` the first element of `list1` onto the front of the result

```
(define (append list1 list2)
  (cond ((null? list1) list2)              ; base case
        (else
          (cons (car list1)
                (append (cdr list1))))))   ; recursion

(define 5-to-7 (list 5 6 7))
(append 5-to-7 1-to-4) -> (5 6 7 1 2 3 4)
```

Square all items in a list

```
(define (square-em lst)
  (if (null? lst)
      nil
      (cons (square (car lst))
            (square-em (cdr lst)))))

(square-em 1-to-4) -> (1 4 9 16)
```

Cube all items in a list

```
(define (cube-em lst)
  (if (null? lst)
      nil
      (cons (cube (car lst))
            (cube-em (cdr lst)))))

(cube-em (square-em 1-to-4)) -> (1 64 729 4096)
```

Map a procedure over a list

```
(define (map proc lst)
  (if (null? lst)
      nil
      (cons (proc (car lst))
            (map proc (cdr lst)))))

(map square 1-to-4) -> (1 4 9 16)
```

Example: Scale a list

```
(define (scale-list lst factor)
  (map (lambda (x) (* x factor))
       lst))

(scale-list 1-to-4 10) -> (10 20 30 40)
```

Pick odd elements out of a list

```
(define (odds lst)
  (cond ((null? lst) nil)
        ((odd? (car lst))
         (cons (car lst)
               (odds (cdr lst))))
        (else
          (odds (cdr lst)))))

(odds 1-to-4) -> (1 3)
```

Filter

```
(define (filter pred lst)
  (cond ((null? lst) nil)
        ((pred (car lst))
         (cons (car lst)
               (filter pred (cdr lst))))
        (else (filter pred (cdr lst)))))

(filter odd? 1-to-4) -> (1 3)
(filter even? 1-to-4) -> (2 4)
```

Enumerate Integers

```
(define (integers-between low high)
  (if (> low high)
      nil
      (cons low (integers-between (+ low 1)
                                  high))))

(integers-between 5 9) -> (5 6 7 8 9)
```

Examples

```
(map fib (integers-between 10 20))) -> (55 89 ... 6765)
```

Fibonacci numbers:

$$Fib(n) = \begin{cases} 0 & \text{if } n = 0 \\ 1 & \text{if } n = 1 \\ Fib(n-1) + Fib(n-2) & \text{otherwise} \end{cases}$$

```
(define (fib n)
  (cond ((= n 0) 0)
        ((= n 1) 1)
        (else (+ (fib (- n 1))
                 (fib (- n 2))))))

(filter even? (map fib (integers-between 10 20)))

(map fib (filter even? (integers-between 10 20)))
```

Add up integers in list

```
(define (addem-up lst)
  (if (null? lst)
      0
      (+ (car lst)
         (addem-up (cdr lst)))))
```

Length of a list

```
(define (length lst)
  (if (null? lst)
      0
      (+ 1
         (length (cdr lst)))))
```

Accumulation

```
(define (accumulate op init lst)
  (if (null? lst)
      init
      (op (car lst)
          (accumulate op init (cdr lst)))))

(define (addem-up lst)
  (accumulate + 0 lst))
```

Length as Accumulation

```
(define (length lst)
  (accumulate (lambda (x y) (+ 1 y))
              0
              lst))
```

Append as Accumulation

```
(define (append list1 list2)
  (accumulate cons list2 list1))
```

Using our Tools:

```
(accumulate
  * 1
  (map fib
       (filter even?
               (integers-between 10 20))))
```

Using our Tools:

```
(define (easy lo hi)
  (accum * 1
         (map fib
              (filter even?
                      (integers-between lo hi)))))
```

Not Using our Tools:

```
(define (hard lo hi)
  (cond ((> lo hi) 1)
        ((even? lo) (* (fib lo)
                       (hard (+ lo 1) hi)))
        (else (hard (+ lo 1) hi))))
```

TREES

```
(define tree (list (list 1 2) (list 3 4)))
```

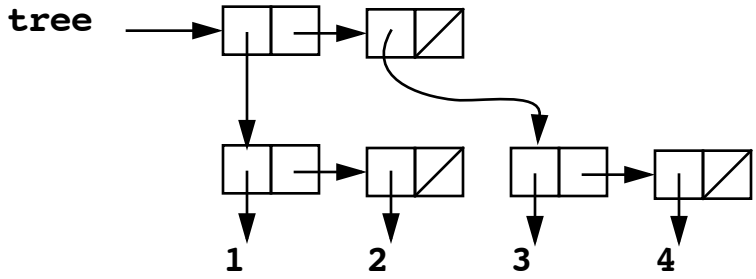


```
(length tree) ->
```

```
(countleaves tree) ->
```

Countleaves

- `countleaves` of the empty list is 0
- `Countleaves` of a tree is `countleaves` of the `car` of that tree plus `countleaves` of the `cdr` of that tree
- `countleaves` of a leaf is 1

```
(define countleaves tree)
  (cond ((null? tree) 0)                    ;base case
        ((atom? tree) 1)                    ;base case
        (else (+ (countleaves (car tree))  ;tree-recursion
                 (countleaves (cdr tree))))))
```

Scaling a Tree

```
(define (scale-tree tree factor)
  (cond ((null? tree) nil)
        ((atom? tree) (* tree factor))
        (else
          (cons (scale-tree (car tree) factor)
                (scale-tree (cdr tree) factor)))))

(scale-tree (list 1 (list 2 (list 3 4) 5) (list 6 7))
            10)
-> (10 (20 (30 40) 50) (60 70))
```

Scaling - As a sequence of sub-trees

```
(define (scale-tree tree factor)
  (map (lambda (sub-tree)
         (if (atom? sub-tree)
             (* sub-tree factor)
             (scale-tree sub-tree factor)))
       tree))
```

Tree Procedures

```
; Compute the sum of the squares of the odd leaves
; in a tree.
(define (sum-odd-squares tree)
  (cond ((null? tree) 0)
        ((atom? tree)
         (if (odd? tree) (square tree) 0))
        (else (+ (sum-odd-squares (car tree))
                 (sum-odd-squares (cdr tree))))))
```

```
; Construct a list of all the even Fibonacci numbers
; Fib(k) where k is <= n
(define (even-fibs n)
  (define (next k)
    (if (< k n)
        nil
        (let ((f (fib k)))
          (if (even? f)
              (cons f (next (+ k 1)))
              (next (+ k 1))))))
  (next 0))
```

sum-odd-squares

- **enumerates the leaves of a tree**
- **filters them, selecting the odd ones**
- **squares each of the selected ones**
- **accumulates the results using +, starting with 0**

even-fibs

- **enumerates the integers from 0 to n**
- **computes the Fibonacci number for each integer**
- **filters them, selecting the even ones, and**
- **accumulates the results using cons, starting with the empty list (not necessary, but shows the similarity in structure to sum-odd-squares)**

sum-odd-squares

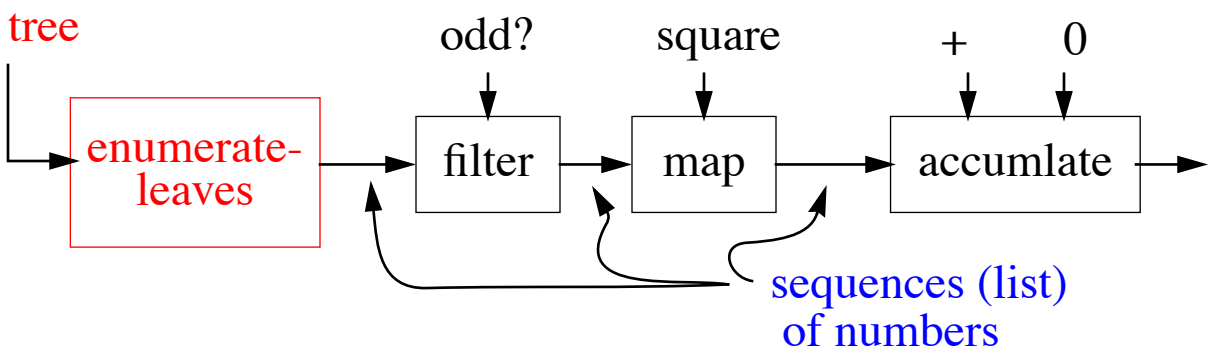

even-fibs

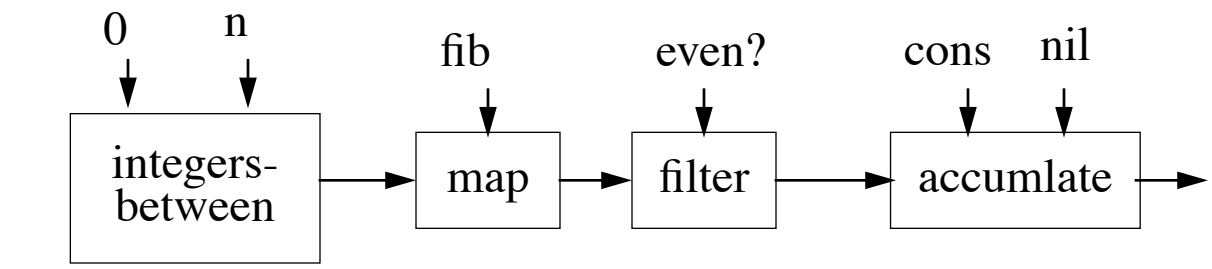

Enumerate-tree

```
(define (enumerate-tree tree)
  (cond ((null? tree) nil)
        ((atom? tree) (list tree))
        (else (append (enumerate-tree (car tree))
                      (enumerate-tree (cdr tree))))))
```

Using Tree/List Tools

```
(define (sum-odd-squares tree)
  (accumulate +
              0
              (map square
                   (filter odd?
                           (enumerate-tree tree)))))

(define (even-fibs n)
  (accumulate cons
              nil
              (filter even?
                      (map fib
                           (integers-between 0 n)))))
```

Nested Enumerations [Optional]

Extend idea of enumeration - generate more complicated lists, e.g. ordered pairs of positive integers i and j, where $1 \le j < i \le n$.

```
(map (lambda (i)
  (map (lambda (j) (list i j))
       (integers-between 1 (- i 1)))
  (integers-between 1 n))
```

```
(define (order-pairs n)
  (accumulate append
              nil
              (map (lambda (i)
                (map (lambda (j) (list i j))
                     (integers-between 1 (- i 1)))
                (integers-between 1 n)))
```

Summary

- Conventional Interfaces
  - lists (arbitrary length)
  - trees (arbitrary depth & length)
  - sequences (infinite length!!)
- Library of standard components
- Modular, clear programs