

# Diagnosis as Semiring-based Constraint Optimization

Martin Sachenbacher and Brian C. Williams<sup>1</sup>

## Abstract.

Constraint optimization is at the core of many problems in Artificial Intelligence. In this paper, we frame model-based diagnosis as a constraint optimization problem over lattices. We then show how it can be captured in a framework for “soft” constraints known as semiring-CSPs. The well-defined mathematical properties of a semiring-CSP permit us to devise efficient solution methods based on decomposing diagnostic problems into trees and applying dynamic programming. We relate the approach to SAB and TREE\*, two diagnosis algorithms for tree-structured systems, which correspond to special cases of semiring-based constraint optimization.

## 1 INTRODUCTION

Many problems in Artificial Intelligence can be framed as optimization problems, where the task is to find a best assignment to a set of variables such that a set of constraints is satisfied. Formalisms for soft constraints aim at more closely integrating constraint satisfaction and optimization. Soft constraints extend hard constraints by defining preference levels, such that assignments are associated with an element from an ordered set. This element can be interpreted as weight, cost, utility, probability, or user preference. A general framework for soft constraints are semiring-CSPs [2], which are based on the mathematical structure of a semiring (a set with two operations  $+$  and  $\times$  on it). The semiring operations ( $+$  and  $\times$ ) model constraint projection and combination, respectively.

In this paper, we show how model-based diagnosis, and in general optimization problems composed of a lattice preference structure and hard constraints, can be framed as semiring-CSPs. The approach is based on breaking down a global objective function, and defining preference levels locally per each constraint. This extends on work in [14], and leads to a general framework where different notions of model-based diagnosis found in the literature (cardinality-minimal diagnosis [7], subset-minimal diagnosis [11, 3], and probabilistic diagnosis [3]) can be easily obtained by choosing an appropriate semiring. In the process, we interpret and exploit assumptions commonly made in model-based diagnosis as special properties of the optimization problem behind it.

For classical constraint satisfaction problems (CSPs), local consistency techniques [10] provide the basis for effective solution methods. The mathematical properties of semiring-constraints ensure that local consistency is still applicable, except that it has to be organized as directional consistency in a tree-structured evaluation scheme. We present a method for computing solutions to a diagnostic problem, formulated as a semiring-CSP, that is based on decomposing the constraint network into an equivalent, tree-structured instance [8]. From

the tree, leading solutions can be efficiently enumerated using directional consistency (an instance of dynamic programming) and a monotonicity property of semirings that allows early pruning of inferior solutions.

The paper is organized as follows. The next section formally defines model-based diagnosis as constraint optimization over lattices. Section 3 reviews semiring-CSPs. Section 4 frames constraint optimization over lattices, and in particular diagnosis, as a semiring-CSP, and defines conditions under which the global objective function can be folded into the constraints to define preference levels locally. Section 5 presents an algorithm for solving semiring-CSPs efficiently based on tree decomposition, dynamic programming and pruning. Finally, in Section 6 we show that SAB and TREE\*, two diagnosis algorithms for tree-structured systems [6, 13], can be understood as special instances of semiring-based constraint optimization.

## 2 DIAGNOSIS AS CONSTRAINT OPTIMIZATION OVER LATTICES

**Definition 1 (Constraint System)** A constraint system over  $\{\top, \perp\}$  is a tuple  $(X, D, F)$ , where  $X = \{x_1, \dots, x_n\}$  is a set of variables,  $D = \{D_1, \dots, D_n\}$  is a set of finite domains, and  $F = \{f_1, \dots, f_m\}$  is a set of constraints. The constraints  $f_j$  are functions defined over  $\text{var}(f_j)$ , where allowed tuples have value  $\top$  and disallowed tuples have value  $\perp$ .

For example, the boolean polycell circuit [14] shown in Fig. 1 can be framed as a constraint system with variables  $X = \{a, b, c, d, e, f, g, x, y, z, o1, o2, o3, a1, a2\}$ . Variables  $a$  to  $z$  are boolean variables with domain  $\{0, 1\}$ , whereas variables  $o1$  to  $a2$  describe the mode of a component and have domain  $\{G, B\}$ . If a component is good (denoted G) then it correctly performs its boolean function. If a component is broken (denoted B) then no assumption is made about its behavior. For the moment, we assume that observations (as stated in Fig. 1) are included in the set of constraints. We shall return later to the issue of how they can be added at run-time.

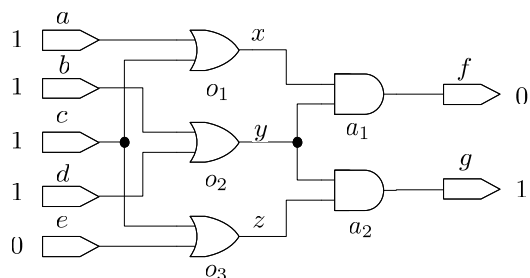


Figure 1. The Boolean Polycell example consists of three OR gates and two AND gates. Input and output values are observed as indicated.

<sup>1</sup> MIT Computer Science and Artificial Intelligence Laboratory, Cambridge, MA 02139, USA email: {sachenba,williams}@mit.edu

In the following, by  $t \downarrow_Y$  we denote the projection of a tuple on a subset  $Y$  of its variables. Given a constraint system  $C$  and a subset of the variables  $Z \subseteq X$ , a *solution* is a tuple  $t_Z$  over the variables in  $Z$  such that there exists an extension  $t$  of  $t_Z$  to all variables  $X$  that fulfills the constraints, that is,  $t \downarrow_Z = t_Z$  and  $f_j(t \downarrow_{\text{var}(f_j)}) = \top$  for all  $f_j \in F$ . We denote the set of solutions to  $C$  as  $\text{sol}(C)$ . In diagnosis, the set  $Z$  corresponds to the mode variables. For example, for the boolean polycell in Fig. 1,  $Z$  is the set of variables  $\{o1, o2, o3, a1, a2\}$ . Optimization extends a constraint system by an objective function that defines preference levels on the solutions:

**Definition 2 (Objective Function)** An objective function  $U$  maps tuples over  $Z \subseteq X$  to a set  $A$  with a partial order  $\leq_A$  that forms a complete lattice (that is, every subset of elements  $I \subseteq A$  has a greatest lower bound  $\text{glb}(I) \in A$  and a least upper bound  $\text{lub}(I) \in A$ ).

Objective functions and lattices can frame both qualitative and quantitative notions of minimality in diagnosis. In cardinality-minimal diagnosis [7],  $A$  is the set of integer values with total order  $\leq$ , and  $U$  returns for each mode assignment the number of fault modes. In probabilistic diagnosis [3],  $A$  is the interval  $[0, 1]$  with total order  $\leq$ , and  $U$  associates a probability value with each mode assignment. In subset-minimal diagnosis [11, 3],  $A$  is the lattice of subsets of  $Z$  with partial order  $\subseteq$ , and each mode assignment is mapped to the subset of variables that represent a fault mode. One can think of further instances, for example, associating a repair cost, or partially ordered user preferences, with each mode assignment.

For the boolean polycell example in Fig. 1, the cardinality-minimal diagnoses are  $o1=B, o2=G, o3=G, a1=G, a2=G$  with value 1 and  $o1=G, o2=G, o3=G, a1=B, a2=G$  with value 1. If we assume that OR gates have 1% probability of failure and AND gates have .5% probability of failure, then the two leading probabilistic diagnoses are the same assignments with values .0097 and .0048, respectively. The subset-minimal diagnoses are  $o1=B, o2=G, o3=G, a1=G, a2=G$  with value  $\{o1\}$ ,  $o1=G, o2=G, o3=G, a1=B, a2=G$  with value  $\{a1\}$ , and  $o1=G, o2=B, o3=G, a1=G, a2=B$  with value  $\{o2, a2\}$ .

### 3 SEMIRING-CSPS

Semiring-CSPs [2] are a framework for “soft” constraints where the constraints are extended to include a preference level. Semiring-CSPs subsume many other notions of preferences in constraints, such as fuzzy CSPs, probabilistic CSPs, optimal CSPs [14], or partial constraint satisfaction.

**Definition 3 ([2])** A c-semiring is a tuple  $(A, +, \times, \mathbf{0}, \mathbf{1})$  such that

1.  $A$  is a set and  $\mathbf{0}, \mathbf{1} \in A$ ;
2.  $+$  is a commutative, associative and idempotent (i.e.,  $a \in A$  implies  $a + a = a$ ) operation with unit element  $\mathbf{0}$  and absorbing element  $\mathbf{1}$  (i.e.,  $a + \mathbf{0} = a$  and  $a + \mathbf{1} = \mathbf{1}$ );
3.  $\times$  is a commutative, associative operation with unit element  $\mathbf{1}$  and absorbing element  $\mathbf{0}$  (i.e.,  $a \times \mathbf{1} = a$  and  $a \times \mathbf{0} = \mathbf{0}$ );
4.  $\times$  distributes over  $+$  (i.e.,  $a \times (b + c) = (a \times b) + (a \times c)$ ).

For instance,  $S_b = (\{0, 1\}, \vee, \wedge, 0, 1)$  forms a c-semiring. The idempotency of the  $+$  operation induces a partial order  $\leq_S$  over  $A$  as follows:  $a \leq_S b$  iff  $a + b = b$  (for  $S_b$ ,  $0 \leq_S 1$ ). In [2] it is shown that  $(A, \leq_S)$  forms a lattice. The partial order defines levels of preference and in turn the “best” solutions for constraints defined over a c-semiring.

**Definition 4 (Constraint System over Semiring)** A constraint system over a c-semiring is a constraint system where the constraints  $f_j \in F$  are functions defined over  $\text{var}(f_j)$  assigning to each tuple a value in  $A$ .

“Classical” constraints [10] correspond to constraint systems over the semiring  $S_b$ , where allowed tuples have value 1 and disallowed tuples have value 0.

**Definition 5 (Combination and Projection)** Let  $f$  and  $g$  be two constraints defined over  $\text{var}(f)$  and  $\text{var}(g)$ , respectively. Then,

1. The combination of  $f$  and  $g$ , denoted  $f \otimes g$ , is a new constraint over  $\text{var}(f) \cup \text{var}(g)$ , where each tuple  $t$  has value  $f(t \downarrow_{\text{var}(f)}) \times g(t \downarrow_{\text{var}(g)})$ ;
2. The projection of  $f$  onto a set of variables  $Y$ , denoted  $f \downarrow_Y$ , is a new constraint over  $Y \cap \text{var}(f)$ , where each tuple  $t$  has value  $f(t_1) + f(t_2) + \dots + f(t_k)$ , and  $t_1, t_2, \dots, t_k$  are all the tuples of  $f$  for which  $t_i \downarrow_Y = t$ .

Given a constraint system  $(X, D, F)$  over a c-semiring, the constraint optimization problem is to compute a function  $g$  over  $Z \subseteq X$  such that  $g(t)$  is the best value attainable by extending  $t$  to  $X$ , i.e.,  $g(t) = (\bigotimes_{j=1}^m f_j) \downarrow_Z$ .

## 4 DIAGNOSIS AS SEMIRING-BASED CONSTRAINT OPTIMIZATION

In this section, we show how optimization over lattices, as defined in Sec. 2, and in particular diagnosis, can be formulated as a semiring-CSP. We first show that it is possible to “reconstruct” an equivalent semiring-CSP from a constraint system over  $\{\top, \perp\}$  and a lattice. We then investigate under which conditions it is possible to break down the global objective function and to define preference levels locally, that is, per each constraint, such that the ranking of solutions is still preserved. This builds on conditions that were defined in [5] in the context of cost-based optimization in tree-structured CSPs. We illustrate how these conditions correspond to assumptions commonly made in model-based diagnosis.

**Definition 6 (Separable Objective Function)** An objective function  $U$  is  $\times$ -separable into a set of functions  $u_1, \dots, u_k$ , if  $\times$  is a commutative, associative operation on  $A$  with unit element  $\text{lub}(A)$ , absorbing element  $\text{glb}(A)$ , and  $u_1 \otimes \dots \otimes u_k = U$ .

**Theorem 1 (Optimization as Semiring-CSP)** Let  $C = (X, D, F)$  be a constraint system over  $\{\top, \perp\}$  and  $U$  be an objective function  $\times$ -separable into  $u_1, \dots, u_k$ . Define a constraint system  $(X, D, F')$  over  $A$  as follows: For each  $f_j \in F$ , let  $f'_j$  be defined over  $\text{var}(f_j)$  as  $f'_j(t) = \text{glb}(A)$  if  $f_j(t) = \perp$  and  $f'_j(t) = \text{lub}(A)$ , otherwise. Let  $F' = f'_1 \cup \dots \cup f'_m \cup u_1 \cup \dots \cup u_k$ . Then  $(A, \text{lub}, \times, \text{glb}(A), \text{lub}(A))$  is a c-semiring, and  $(\bigotimes_{i=1}^{m+k} f'_i) \downarrow_Z = U(\text{sol}(C))$ .

Every objective function  $U$  is trivially  $\times$ -separable into itself, by choosing  $a \times b = \text{glb}(\{a, b\})$ . This implies that every constraint system  $C$  over  $\{\top, \perp\}$  with objective function  $U$  can be turned into a semiring-CSP over  $A$  that has the same set of solutions as  $C$  and ranks them in the same way as  $U$ . For instance, the objective function  $U$  for subset-minimal diagnosis (Sec. 2) is  $\times$ -separable into unary functions  $u_i$  defined over  $z \in Z$ , where  $\times \equiv \cup$ ,  $u_i(t) = \emptyset$  if  $t$  represents a correct assignment, and  $u_i(t) = \{z\}$  if  $t$  represents a faulty assignment. Likewise, the objective functions for cardinality-minimal diagnosis and probabilistic diagnosis are  $\times$ -separable into

unary functions, where  $\times \equiv +$  and  $\times \equiv \cdot$ , respectively. For model-based diagnosis, non-trivially  $\times$ -separable objective functions correspond to the assumption that faults or sets of faults occur independent of each other. Together with the results in [2], Theorem 1 establishes a firm correspondence between lattice preference structures over “hard” constraints (functions onto  $\{\top, \perp\}$ ) and semiring-CSPs.

Up to now, we have two different types of constraints in the semiring-CSP: functions  $u_i$  that are defined only over variables from the set  $Z$  of variables of interest, and bi-valued functions  $f_j$  that are defined over variables from the set  $X$  of all variables. We seek to eliminate this distinction by combining the two types of constraints.

**Definition 7 (Containment)** A function  $u_i \in F$  is contained in  $f_j \in F$ , if  $\text{var}(u_i) \subseteq \text{var}(f_j)$ .

A part  $u_i$  of the objective function that is contained in a hard constraint  $f_j$  can be applied to the tuples of  $f_j$ , turning it into a soft constraint. We can thus reduce the set of constraints, without changing the set of solutions, by simply composing  $u_i$  and  $f_j$ :

**Theorem 2 (Absorbing Contained Constraints)** Let  $(X, D, F)$  be a constraint system over a  $c$ -semiring  $(A, +, \times, \mathbf{0}, \mathbf{1})$ . Let  $u_i, f_j \in F$  be functions such that  $u_i$  is contained in  $f_j$ . Then for the constraint system  $(X, D, F')$  where  $F' = F \setminus \{u_i, f_j\} \cup (u_i \otimes f_j)$ ,  $(\bigotimes_{j=1}^m f_j) \Downarrow_Z = (\bigotimes_{j=1}^{m-1} f'_j) \Downarrow_Z$ .


For model-based diagnosis, the assumption that faults are independent for individual components means that there exists a  $\times$ -separation such that each  $u_i$  will be contained in at least one  $f_j$ . Consequently, the objective function can be completely absorbed into the constraints representing the components. Note that this does not exclude cases where a component has more than one mode variable (e.g., sets of mode variables that are temporally indexed for different time steps), and it does not exclude cases where the objective function associates values with tuples of mode variables (e.g., a probability with the transition between two modes).

We can now summarize different notions of model-based diagnosis, introduced in Sec. 2, as special cases of semiring-based constraint optimization. Table 1 shows the resulting constraint (after absorption) for an AND-gate for each of the three notions of diagnosis.

- **Cardinality-Minimal Diagnosis** can be obtained by choosing the semiring  $S_c = (\mathbb{N}_0^+ \cup \infty, \min, +, \infty, 0)$ .
- **Probability-Maximal Diagnosis** can be obtained by choosing the semiring  $S_p = ([0, 1], \max, \cdot, 0, 1)$ . For probabilistic diagnosis, the objective function being  $\times$ -separable corresponds to the assumption that failures are conditionally independent.
- **Subset-Minimal Diagnosis** can be obtained by choosing the semiring  $S_s = (2^Z, \cap, \cup, Z, \emptyset)$ . The operator  $\cap$  induces an ordering on  $a, b \in 2^Z$  as follows:  $a \leq_S b$  iff  $a \supseteq b$ .

**Table 1.** Constraint  $f_{a1}$  in the polycell example (Fig. 1) for semirings  $S_c$  (left),  $S_p$  (center), and  $S_s$  (right). Tuples not shown have value  $\mathbf{0}$ .

$a2$	$g$	$y$	$z$		$a2$	$g$	$y$	$z$		$a2$	$g$	$y$	$z$	
G	0	0	0	0	G	0	0	0	.995	G	0	0	0	$\emptyset$
G	0	0	1	0	G	0	0	1	.995	G	0	0	1	$\emptyset$
G	0	1	0	0	G	0	1	0	.995	G	0	1	0	$\emptyset$
B	0	0	0	1	B	0	0	0	.005	B	0	0	0	$\{a1\}$
B	0	0	1	1	B	0	0	1	.005	B	0	0	1	$\{a1\}$
B	0	1	0	1	B	0	1	0	.005	B	0	1	0	$\{a1\}$
B	0	1	1	1	B	0	1	1	.005	B	0	1	1	$\{a1\}$

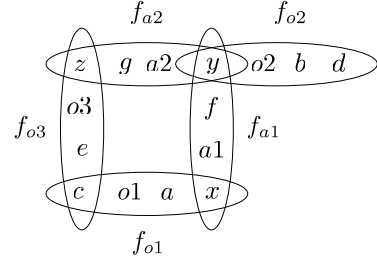

**Figure 2.** Hypergraph for the example in Fig. 1.

## 5 DECOMPOSITION AND DYNAMIC PROGRAMMING

Framing a diagnostic problem as a semiring-CSP is the basis for solving it using constraint optimization methods. In particular, semiring-CSPs allow one to apply dynamic programming and early pruning to efficiently compute leading solutions. In this section, we present a backtrack-free algorithm that returns all solutions up to a user-specified threshold of preference.

The mathematical properties of  $c$ -semirings guarantee that local constraint propagation [10], an efficient technique to solve classical (hard) constraints, works in this extended framework as well. The exception is that the  $\times$ -operation is not necessarily idempotent, which means that constraint propagation cannot be applied in a “chaotic” way anymore. Research that aims at extending the notion of local consistency to soft constraints [12] has, therefore, focused on directional consistency, where constraints are propagated in an organized way following a hierarchical (tree) scheme.


The goal of structural decomposition methods [8, 9] is to turn arbitrary constraint networks into equivalent, tree-structured (acyclic) instances, possibly by aggregating constraints together. Structural decomposition is based on the hypergraph  $H$  of a constraint system  $(X, D, F)$ , which associates a node with each variable  $x_i \in X$ , and a hyperedge with each constraint  $f_j \in F$ . Figure 2 shows the hypergraph for the boolean polycell circuit.

**Definition 8 (Tree Decomposition [8, 9])** A tree decomposition for a constraint system  $(X, D, F)$  is a triple  $(T, \chi, \lambda)$ , where  $T = (V, E)$  is a rooted tree, and  $\chi, \lambda$  are labeling functions associating with each node  $v \in V$  two sets  $\chi(v) \subseteq X$  and  $\lambda(v) \subseteq F$ , such that

1. For each  $f_j \in F$ , there exists exactly one  $v \in V$  such that  $f_j \in \lambda(v)$ . For this  $v$ ,  $\text{var}(f_j) \subseteq \chi(v)$ ; (covering condition);
2. For each  $x_i \in X$ , the set  $\{v \in V \mid x_i \in \chi(v)\}$  induces a connected subtree of  $T$  (connectedness condition).

Figure 3 shows a tree decomposition of the boolean polycell. For a constraint system  $C = (X, D, F)$ , a tree decomposition  $T$  defines an equivalent, tree-structured constraint system  $(X, D, F')$  found by combining the constraints in  $\lambda(v)$  for each node  $v \in V$ , that is,  $F' = \bigcup_{v \in N} (\bigotimes_{f_j \in \lambda(v)} f_j)$ . Note that a unary constraint over a variable  $x_i$  can be added to the tree decomposition, without violating the covering and connectedness conditions, by adding it as a child of any node  $v$  for which  $x_i \in \chi(v)$ . This allows one to perform decomposition as an off-line step, and to add observations for variables after the tree has been constructed.

Decomposition can be understood as a minimal “repair” to the constraint network such that directional consistency (dynamic programming) becomes applicable. Solutions to a tree-structured

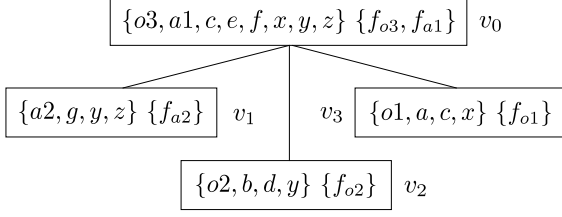

**Figure 3.** A tree decomposition of the hypergraph in Fig. 2, showing the labels  $\chi$  and  $\lambda$  for each node.

semiring-CSP can be computed backtrack-free in two steps. The first step computes values for tuples bottom-up, using an instance of dynamic programming. This step can be viewed as generating an exact heuristic for search. In a second, top-down step, these values are used to enumerate solutions. This step can be viewed as a search that is guided by an exact heuristic, and therefore backtrack-free.

Work on constraint optimization based on decomposition and dynamic programming [5, 4, 9] has focussed on the task of computing best values for individual variables, or a single best assignment to all variables. We extend this work to address important requirements of the diagnosis context. First, in diagnosis it is typical that only a limited number of leading solutions is required. For instance, if the values of the solutions correspond to probabilities, the task could be to find a set of most likely solutions that cover most of the probability density space. We deliver on this requirement by exploiting an extensiveness property of c-semirings to prune the search space in the bottom-up and top-down phase. Second, in diagnosis it is typical that most variables are not mode variables. It would, therefore, be too costly to enumerate solutions to the constraints that differ only in the values for variables  $X \setminus Z$ . Our approach avoids this by systematically eliminating these variables during the top-down phase.

The pseudocode for the bottom-up dynamic programming phase is shown in Fig. 4. In Fig. 4, function `children()` returns the set of children of a node.  $f(v)$  is the constraint for node  $v$ . The operation  $f(v) \otimes f(c_i) \downarrow_{\text{var}(f(v))}$ , also known as semi-join, is the step that establishes directional consistency between a node  $v$  and its child  $c_i$ . It is a generalization of directional arc consistency for CSPs [10] to the case of soft constraints. The restriction operator  $\downarrow_{\leq}^b$  “prunes” tuples of a constraint by setting their value to  $\mathbf{0}$  if it is worse than  $b$ . Formally,  $f_j \downarrow_{\leq}^b$  returns a function  $f'_j$  where  $f'_j(t) = f_j(t)$  if  $f_j(t) \leq_S b$ , and  $f'_j(t) = \mathbf{0}$ , otherwise. If the bottom-up algorithm is provided with a cut-off parameter  $b$ , the restriction operator limits the computation to tuples whose value is  $\leq_S b$ . This exploits the extensiveness property of c-semirings [2], that is,  $(a \times b) \leq_S a$  for all  $a, b \in A$ .

```

function solve( $v, b$ )
  for each  $c_i \in \text{children}(v)$ 
    solve( $c_i$ )
     $f(v) \leftarrow (f(v) \otimes f(c_i) \downarrow_{\text{var}(f(v))}) \downarrow_{\leq}^b$ 
    if  $c(v) \equiv \mathbf{0}$  then
      throw inconsistent()
    end if
  end for

```

**Figure 4.** Bottom-up phase for solving a tree-structured semiring-CSP through dynamic programming

```

function extract( $T, b$ )
   $v \leftarrow \text{preorder-node-iterator-first}(T)$ 
   $M \leftarrow \emptyset$ 
   $r \leftarrow f(v) \downarrow_{\leq}^b$ 
  begin loop
    for each  $c_i \in \text{children}(v)$ 
       $M \leftarrow M \cup (\chi(v) \cap \chi(c_i))$ 
    end for
     $r \leftarrow r \downarrow_{(\text{var}(r) \cap M) \cup Z}$ 
     $v \leftarrow \text{preorder-node-iterator-next}(T)$ 
    if ( $v = \text{nil}$ ) then
      return  $r$ 
    end if
    if not ( $\times$  idempotent) then
       $r \leftarrow r \otimes^{-1} f(v) \downarrow_{\text{var}(r)}$ 
    end if
     $r \leftarrow (r \otimes f(v)) \downarrow_{\leq}^b$ 
     $M \leftarrow M \setminus (\chi(\text{parent}(v)) \cap \chi(v))$ 
  end loop

```

**Figure 5.** Top-down phase for enumerating solutions to a tree-structured semiring-CSP for which  $\times$  is idempotent or has an inverse.

Values for solutions can be found by calling `solve(root( $T$ ),  $b$ )`, where `root( $T$ )` is the root node of  $T$ . After completion of the algorithm, the best value of the tuples in  $f(\text{root}(T))$  is the value of the optimal solution. If  $\leq_S$  is only a partial order, then the best value of the tuples in  $f(\text{root}(T))$  is a lub for the value of the optimal solution. The problem has no consistent solution if and only if there is a node  $v$  in the tree for which  $f(v) \equiv \mathbf{0}$ .

The time complexity of the bottom-up phase is exponential in the maximum number of variables in a tree node (called the tree width), and its space complexity is exponential in the maximal number of variables that are shared between two tree nodes (called the separator size) [4, 9]. Hence, the benefit of tree decomposition is that it breaks down the complexity from being exponential in the number of all variables to being exponential in the number of variables per tree element (node or edge). Note that the complexity does not depend on the chosen semiring.

The pseudocode for the top-down solution enumeration phase is shown in Fig. 5. It enumerates the solutions with value  $a \leq_S b$ . For instance, in cardinality-minimal diagnosis (semiring  $S_c$ ), one might perform the bottom-up phase with a limitation to single and double faults ( $b=2$ ), and, if it turns out that single faults exist, enumerate only the single faults ( $b=1$ ) in the top-down phase.

The algorithm in Fig. 5 can be understood as projecting the tree on the variables  $Z$ . Function `preorder-node-iterator()` enumerates the nodes of the tree  $T$  in pre-order (for the tree in Fig. 3, for example, in order  $v_0, v_1, v_2, v_3$ ). A multi-set  $M$  represents the variables that are shared between the traversed and the untraversed part of the tree ( $M$  is a multi-set rather than a set because the same variable can occur on more than one edge of the tree). Constraint  $r$  contains the partial solutions and is defined over variables from  $Z$  and  $M$ . The algorithm updates  $M$  as the tree is traversed. A variable in  $X \setminus Z$  can be eliminated from  $r$  once it no longer occurs in  $M$ . In addition, if the operator  $\times$  is not idempotent, the bottom-up propagation has to be “canceled” by a semijoin operation  $r \otimes^{-1} f(v) \downarrow_{\text{var}(r)}$  using the inverse ( $\times^{-1}$ ) of the operator  $\times$ .

The complexity of the top-down phase, as stated in Fig. 5, is worst-case exponential in the number of variables  $X$  (it is possible to further optimize the solution enumeration phase to being worst-case exponential in the number of variables  $Z$  only). The algorithm requires that the  $\times$ -operator of the semiring is idempotent or has an inverse. This is the case for all three semirings  $S_c$ ,  $S_s$ , and  $S_p$ .

## 6 SAB AND TREE\*

SAB [6] and TREE\* [13] are two diagnostic algorithms for tree-structured systems.

SAB is a dynamic programming algorithm based on “weighing” assignments to mode variables. A correct assignment has weight 0, whereas an abnormal (faulty) assignment has weight 1. The goal is to minimize the total sum of weights. This corresponds to the semiring  $S_c$ . The assumption that mode variables are not shared between constraints is built into the weighting scheme; SAB would lead to incorrect results if applied to diagnostic models that violate this assumption. SAB has been combined with tree decomposition. However, SAB only extracts a single best solution, and does not use a restriction operator. In [6], it has been shown that SAB compares favorably to the conflict-based diagnostic algorithm GDE [3].

Like SAB, TREE\* computes cardinality-minimal diagnoses. TREE\* is based on the idea that the set of consistent assignments to  $Z$  is sometimes small enough to associate it directly with each tuple, instead of associating a lub with each tuple that guides the enumeration of these assignments in a separate top-down phase. That is, TREE\* collapses the bottom-up and the top-down phase into a single phase. The set of assignments is concise because a cut-off is used and because mode assignments are compactly represented as subsets of  $Z$ . In TREE\*, the variables  $Z$  (mode variables) are not included in the constraint system. Instead, mode assignments are associated with tuples of the constraints. Mode assignments combine through the operator  $\cup$ . Since sets of mode assignments are considered, the values of tuples combine through the cartesian product,  $A \times B = \{a \cup b \mid a \in A, b \in B\}$ . TREE\* uses a cut-off to restrict the cardinality of the sets and thus the cardinality of the diagnoses. Since there is no separate solution enumeration phase, solutions are found by combining the values of tuples in the root of the tree (that is, a special root node with  $\chi = \emptyset$  is used).

TREE\* treats the constraints and the values for their tuples separately, that is, it performs semi-joins on bi-valued constraints, and updates the values of the tuples in a subsequent step. However, note that updating the values can become exponential in  $Z$  even if the task is only to find a single best diagnosis. Efficient data-structures, such as algebraic decision diagrams (ADDs) [1], exist for constraints (functions) over  $c$ -semirings where  $A$  is a subset of the real numbers (as is the case for  $S_c$  and  $S_p$ ). For larger constraints and larger  $Z$ , it is therefore more efficient to separate the bottom-up and the top-down phases. Also, this allows for using two different cut-off parameters  $b$ , which permits better control over the number of diagnoses generated.

TREE\* has been combined with a decomposition method for hard constraints called hypertree decomposition [8]. For hard constraints, hypertree decomposition is a more powerful decomposition method because, unlike tree decomposition, it allows for re-using constraints in different nodes of the tree. However, in the context of soft constraints, this advantage diminishes because multiple occurrences of the same constraint clash with the possible non-idempotency of the constraint combination operator [9]. In [13] it has been empirically shown that TREE\* can outperform SAB, an effect that can be mainly attributed to the use of a cut-off in TREE\*.

## 7 CONCLUSION

This work builds on recent research in constraint programming and optimization, extending and modifying it for the context of model-based diagnosis. Semiring-CSPs [2] are based on local preferences (defined per each constraint), whereas diagnosis is based on global preferences (defined per each solution). We therefore “reversed” the view in [2], starting from lattices over hard constraints, and investigated ways to fold them into a constraint system. This enhances the practical usefulness of semiring-CSPs, and it leads to methods and algorithms that allow one to perform model-based diagnosis over the general class of lattice preference structures. In contrast, existing diagnosis algorithms, such as SAB and TREE\*, require that preferences are mutually independent for individual variables; in the terminology of our framework, the objective function must be  $\times$ -separable into unary functions. This is not required in our framework, although it can still be exploited: if the objective function is  $\times$ -separable into small (unary) functions, this will lead to better (complete) absorption of contained constraints (Theorem 2), and therefore, to a smaller constraint system.

Our work establishes a firm relationship between diagnosis as constraint satisfaction over lattices, semiring-based constraint optimization, and constraint propagation (dynamic programming) algorithms. The algorithms presented in this paper have been implemented using a (modified) version of algebraic decision diagrams (ADDs) [1] in order to represent semiring-constraints. We are currently experimenting with random examples and real-world applications from the spacecraft domain. Current and future work includes incorporating techniques from distributed database systems in order to perform the constraint operations in an intelligent way, in particular, processing large constraints only partially and caching intermediate results for incremental propagation.

## REFERENCES

- [1] R.I. Bahar, E.A. Frohm, C.M. Gaona, G.D. Hachtel, E. Macii, A. Pardo, and F. Somenzi, ‘Algebraic Decision Diagrams and Their Applications’, in *IEEE International Conference on CAD*, pp. 188–191, (1993).
- [2] S. Bistarelli, U. Montanari, and F. Rossi, ‘Semiring-based constraint satisfaction and optimization’, *Journal of the ACM*, **44**(2), (1997).
- [3] J. de Kleer and B.C. Williams, ‘Diagnosing multiple faults’, *Artificial Intelligence*, **32**(1), 97–130, (1987).
- [4] R. Dechter, ‘Bucket elimination: A unifying framework for reasoning’, *Artificial Intelligence*, **113**, 41–85, (1999).
- [5] R. Dechter, A. Dechter, and J. Pearl, ‘Optimization in constraint networks’, in *Influence Diagrams, Belief Nets and Decision Analysis*, eds., R.M. Oliver and J.Q. Smith, 411–425, John Wiley & Sons, (1990).
- [6] Y. El Fattah and R. Dechter, ‘Diagnosing tree-decomposable circuits’, in *Proceedings of IJCAI-95*, pp. 1742–1749, (1995).
- [7] M.R. Genesereth, ‘The use of design descriptions in automated diagnosis’, *Artificial Intelligence*, **24**(1–3), 411–436, (1984).
- [8] G. Gottlob, N. Leone, and F. Scarcello, ‘A comparison of structural CSP decomposition methods’, *Artificial Intelligence*, **124**(2), (2000).
- [9] K. Kask, R. Dechter, J. Larrosa, and F. Cozman, ‘Unifying tree-decomposition schemes for automated reasoning’, Technical report, University of California, Irvine, (2001).
- [10] A.K. Mackworth, ‘Constraint satisfaction’, in *Encyclopedia of Artificial Intelligence*, ed., S.C. Shapiro, 285–293, John Wiley & Sons, (1992).
- [11] R. Reiter, ‘A theory of diagnosis from first principles’, *Artificial Intelligence*, **32**(1), 57–95, (1987).
- [12] T. Schiex, ‘Arc consistency for soft constraints’, in *Principles and Practice of Constraint Programming*, pp. 411–424, (2000).
- [13] M. Stumptner and F. Wotawa, ‘Diagnosing tree-structured systems’, *Artificial Intelligence*, **127**(1), 1–29, (2001).
- [14] B.C. Williams and R. Ragno, ‘Conflict-directed A\* and its role in model-based embedded systems’, *Journal of Discrete Applied Mathematics*, (2003). To appear.